


OMNIKEY® 3921 PC Built-In USB Reader

- ▶ **Plug and Play** - Designed to facilitate easy device installation with high quality drivers* for all major PC operating systems
- ▶ **Readily Compliant** - Meets all relevant industry standards for smooth integration in PC environment
- ▶ **Installation-ready** – Designed for integration into standard 3.5" floppy disk bay
- ▶ **Suits Any Application** - Compatible with virtually any contact smart card and major PC operating systems

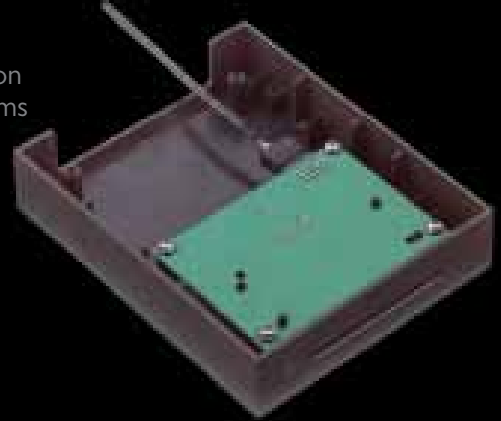

ACCESS quality.

The OMNIKEY® 3921 is a high-performance, built-in, Plug and Play USB reader that can be easily integrated into the 3.5" floppy bay housing within a desktop computer. Featuring a transmission speed to the card of up to 420kbps, the OMNIKEY 3921 reader is compliant with all relevant industry standards.

Compatible with virtually any contact smart card or operating system, as well as a variety of applications, this easy-to-install OMNIKEY reader is well-suited for a wide range of smart card operations, including single sign-on, online-banking or digital signature applications.

- ▶ Meets major standards including ISO 7816, EMV 2000, Microsoft® WHQL, USB CCID, PC/SC and HBCI (Home Banking Computer Interface)
- ▶ Usage within an application is based on standardized interfaces like PC/SC, OCF (Open Card Framework) or CT-API
- ▶ Available in a bulk version with internal USB cable for main board connector or as retail version with internal & external USB cable, slot bracket, driver CD and mounting screws
- ▶ USB CCID support makes integration into an existing system the easiest ever, by connecting host and smart card reader without the need of additional drivers
- ▶ All major operating systems supported
- ▶ Meets GSA FIPS 201 requirements
- ▶ Supports high speed data transmission

* For drivers download, please visit www.hidglobal.com/omnikey

Specifications

Base Model Number	OMNIKEY® 3921
Dimensions	4.92" x 3.94" x 0.98" / 125 x 100 x 25mm
Weight (with cable)	3.25 oz / 92 g
Power supply	Bus powered
Operating temperature	32°-131° F (0° - 55° C)
Operating humidity	10-90% rH
HOST INTERFACE	
Host Interface	USB 2.0 CCID ¹ (also compliant with USB 1.1)
Transmission speed	12 Mbps (USB 2.0 full speed)
SMART CARD INTERFACE	
Standards	ISO 7816 & EMV ² 2000 Level 1
Protocols	T=0, T=1, 2-wire: SLE 4432/42 (S=10), 3-wire: SLE 4418/28 (S=9), I ² C (S=8)
Card size	ID-1 (full-size)
Smart Card interface speed	420 kbps (when supported by card)
Smart Card clock frequency	Up to 8 MHz
Supported card types	5V, 3V and 1.8V Smart Cards, ISO 7816 Class A, B and C
Power to Smart Card	60 mA
Smart Card detection	Movement detection with auto power-off / Automatic detection of smart card type/ Short circuit and thermal protection
8 Pin Handling	C4 / C8 supported
Supported APIs	PC/SC driver (ready for 2.01), CT-API (on top of PC/SC), Synchronous-API (on top of PC/SC), OCF (on top of PC/SC)
PC/SC Driver Support	Windows® 2000 / XP (32bit), 2003 Server, 2008 Server, Windows® CE 5.0 / CE.NET / CE 6.0 (depending on hardware), Windows® XP 64bit, Windows® Vista (32bit / 64bit), Windows 7 (32bit / 64bit), Linux®, Mac® OS X (Power PC/Intel)
Embedded Technology	OMNIKEY® Smart@Link Chipset
Status indicator	Green LED
Reader Board	Also available as PCB
Color	Dark Gray
Options	Customer Specific Logo, Label and Colors: Available upon request
Composition	ABS
Connector cable	External: 59.1" (150 cm) Internal: 31.5" (80 cm)
Durability	100,000 insertions
Meantime between failure (MTBF)	500,000 hours
Compliance / Certification	Microsoft® WHQL ³ , EMV ² 2000 Level 1, ISO 7816, HBCI ⁴ , USB 2.0 (USB 1.1 compatible), CCID ¹ , GSA FIPS 201 approved product list
Safety / Environmental	CE, WEEE, FCC, UL, VCCI, MIC, RoHS
Warranty	Two year manufacturer's warranty. (For drivers, see complete lifetime support policy.)

1 = Chip Card Interface Device, 2 = Europay® MasterCard® Visa®, 3 = Windows® Hardware Quality Lab, 4 = Homebanking Computer Interface



© 2009 HID Global Corporation. All rights reserved. HID, the HID logo, Omnikey and the Omnikey logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 02/2009

MKT-OMNIKEY_3921_DS-EN

hidglobal.com



ACCESS experience.

HID Global Offices:

Corporate North America
15370 Barranca Pkwy
Irvine, CA 92618
U.S.A.
Phone: 800 237-7769
Phone: +1 949 732-2000
Fax: +1 949 732-2360

Asia Pacific
19/F 625 King's Road
North Point
Island East
Hong Kong
Phone: +852 3160-9800
Fax: +852 3160-4809

Latin America
Circunvalacion Ote. #201 B
Despacho 2
Col. Jardines del Moral
Leon 37160, Gto.
Mexico
Tel: +52 477 779 1492
Fax: +52 477 779 1493

Europe, Middle East & Africa
Haverhill Business Park
Phoenix Road
Haverhill, Suffolk
CB9 7AE
England
Phone: +44 (0) 1440 714 850
Fax: +44 (0) 1440 714 840